TORQUE STRENGTH RATING-5,500 FT-LB
ULTIMATE CAPACITY* (TENSION/COMPRESSION)-49 KIP
*BASED ON A TORQUE FACTOR OF (Kt)=9

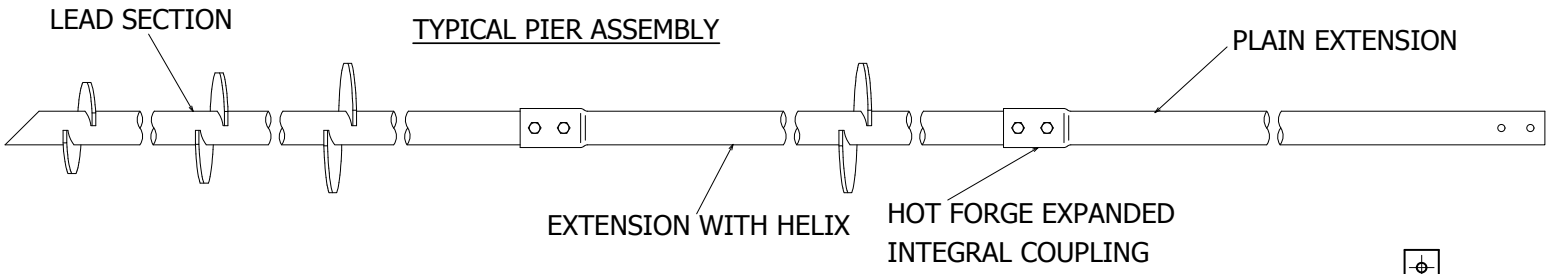

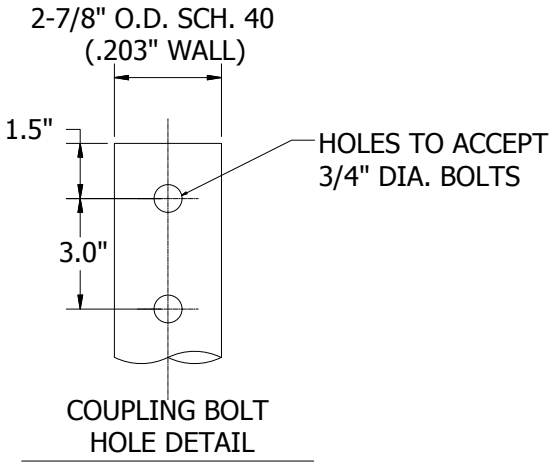

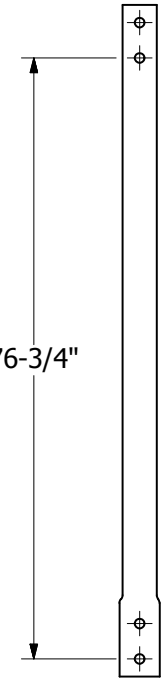

-NOTES-

1. HOT DIP GALVANIZED PER ASTM A153-(LATEST REVISION).
2. EXTENSION SECTION LENGTHS AND ARE NOMINAL.
3. PIPE SHAFT MATERIAL 2.5 " NOMINAL, SCHEDULE 40 WALL THICKNESS PER ASTM A500 GRADE B.
4. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROL FOR ALL MATERIALS AND MANUFACTURING PROCESSES.
5. REFER TO DRAWING SA278-4500 FOR LIST OF PLAIN EXTENSIONS.
6. EXTENSIONS ARE FABRICATED WITH A HOT FORGED EXPANDED INTEGRAL COUPLING CONNECTION ON ONE END.

EARTH ANCHORING SUPPLIERS
The Northeast's Leading Authorized CHANCE Distributor
732-747-7222
earthanchoring.com

CHANCE®

HUBBELL POWER SYSTEMS, INC.

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

TITLE
RS2785.203
PLAIN EXTENSION

SIZE	CAT / PART / ASSY NO.	DWG NO.	REV
C	C2784700	SA2784700	-

DO NOT SCALE THIS DRAWING | DRN BY BCT | DATE 05/19/16 | SHEET 1 OF 1