



TYPICAL ANCHOR/PLIER ASSEMBLY

TORQUE STRENGTH* RATING-5,700 FT-LB
 ULTIMATE CAPACITY (COMPRESSION)-57 KIP
 * BASED ON A TORQUE FACTOR (Kt)=10
 PER ICC-ES AC308 SECTION 3.13.2
 NOMINAL TENSION STRENGTH (COUPLING BOLT)-70 KIP

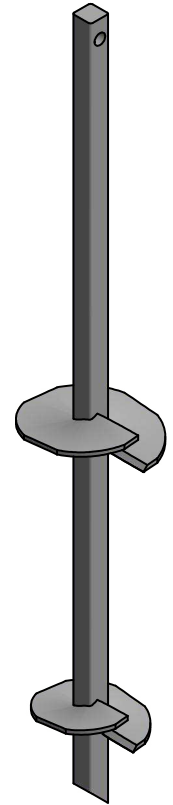

-NOTES-

1. HOT DIP GALVANIZED PER ASTM A153-(LATEST REVISION).
2. LEAD AND EXTENSION SECTION LENGTHS AND HELIX SPACINGS ARE NOMINAL.
3. SHAFT MATERIAL- HOT ROLLED ROUND-CORNERED-SQUARE (RCS) SOLID STEEL BARS PER ASTM A29: MINIMUM YIELD STRENGTH=70 KSI.
4. HELIX MATERIAL- HOT ROLLED LOW CARBON STEEL SHEET, STRIP, OR PLATE PER ASTM A572, OR A1018, OR A656; MINIMUM YIELD STRENGTH=50 KSI; 3/8" THICK.
5. COUPLING BOLTS : 3/4" DIAMETER X 3" LONG HEX HEAD PER ASTM A325 TYPE 1
6. NOMINAL SPACING BETWEEN HELIX PLATES IS THREE TIMES THE DIAMETER OF THE LOWER HELIX.
7. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTROLL FOR ALL MATERIALS AND MANUFACTURING PROCESSES.
8. ALL WELDIGN TO BE DONE BY WELDERS CERTIFIED UNDER SECTION 5 OF THE AWS CODE D1.1.
9. SEE ICC EVALUATION SERVICE INC., EVALUATION REPORT NO. ESR-2794 FOR ALLOWABLE VALUES AND/OR CONDITIONS OF USE CONCERNING MATERIAL PRESENTED IN THIS DOCUMENT.
10. ALL HELIX HAVE A SHARPENED LEADING EDGE

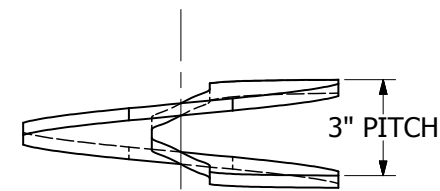

HELIX MUST BE FORMED BY MATING METAL DIE (SIDE VIEW OF TRUE HELICAL FORM)

The Northeast's Leading Authorized Distributor
 CHANCE Distributor
 732-747-7222
 earthanchoring.com

ICC-ES LISTED ESR-2794

CHANCE [®]		HUBBELL [®] HUBBELL POWER SYSTEMS, INC.	
POWER SYSTEMS, INC.			
TITLE			
SS5 LEAD SECTION			
SIZE	CAT / PART / ASSY NO.	DWG NO.	REV
C	C150-0051	SA150-0051	-
DO NOT SCALE THIS DRAWING	DRN BY RJH	DATE 4/5/16	SHEET 1 OF 1

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.